


CRITICAL MONITORING AT A DISTANCE

PREDICTIVE MAINTENANCE MADE EASY

Remote fixed mounted thermal management systems are designed to provide detection capabilities of hard-to-reach areas or places where safety is a concern. FMX 700 devices have been utilized to monitor critical equipment, flares, flare pilots, electrical connections, and tank levels in real-time. Perfect for finding and locating critical failures as well as abnormal temperatures in pipelines and storage facilities.




FMX 700 P-Series

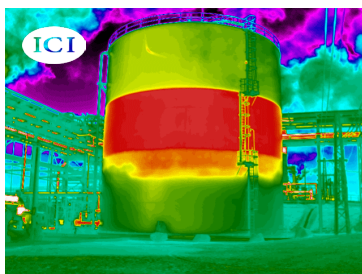

REAL-TIME THERMAL IMAGING

Provides quality resolution thermal images streamed in real-time via Ethernet connection. Multiple color palettes are available to enhance viewing and easily find hot spots. Perfect for industrial and petrochemical monitoring.

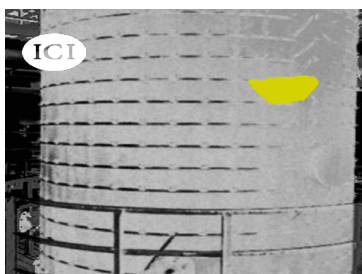

ALARMING FUNCTIONS

Pair the internal infrared device with our IR Flash Pro software and enable the built-in alarming features to receive notifications when thresholds are exceeded. Reduces response time in critical situations. Collect quantitative temperature data for in-depth thermal analysis of hot spots and detect changes over time in order to locate failures before they happen.



ENVIRONMENTALLY PROTECTED

Take the FMX 700 to extreme environments with our explosion-proof, stainless steel thermal device enclosures. They are rated NEMA 4X and IP66 to protect against dirt, dust, and other particulates. The systems have been installed aboard ships as well as oil platforms and withstand high pressure jets as well as salt water exposure.



The FMX 700 P-Series is a 640 x 512 imager with unmatched sensitivity and an accuracy of $\pm 2^{\circ}\text{C}$ ($\pm 3.6^{\circ}\text{F}$) or $\pm 2\%$. It provides real-time thermal imaging of temperatures between -20°C to 550°C (-4°F to 1022°F). Our FMX 700 is designed for fixed mounted applications. The FMX 700 has IP54 protection and includes IR Flash Pro software for thermal analysis. Integrate the device with our stainless steel, explosion-proof housing for imaging objects in hard-to-reach areas or extreme environments.

Features

- Unmatched image sensitivity
- Radiometric data streaming
- 10 Color palettes
- Alarms trigger
- Spot/Area/Isotherm
- Small size
- Light weight
- Low power, < 3.3 W

Applications

- Process control monitoring
- Industrial vision systems
- Predictive maintenance
- Reliability engineering
- Electrical/electronics monitoring
- Scientific research
- Building automation
- Security monitoring

Options

- Frame Rate: 30 Hz
- NETD: < (40 mK) 0.04°C at 30°C (86°F)
- NEMA 4X explosion proof housing
- Standard tripod

Specifications

- **Pixel Resolution:** 640 x 512
- **Accuracy:** $\pm 2^{\circ}\text{C}$ ($\pm 3.6^{\circ}\text{F}$) or $\pm 2\%$
- **Temperature Range:** -20°C to 550°C (-4°F to 1022°F)
- **Operation Range:** -20°C to 70°C (-4°F to 158°F)
- **Storage Range:** -45 to 85°C (-49°F to 185°F)
- **Detector Array:** UFPA (VOx)
- **Pixel Pitch:** 12 μm
- **Focal Length:** 13 mm
- **FOV:** 33.7° x 27°
- **Focus:** electronic
- **Measurement Distance:** lens dependent
- **Spectral Band:** 8 μm - 14 μm
- **Thermal Sensitivity (NETD):**
< (50 mK) 0.05°C at 30°C (86°F)
- **Frame Rate:** 25 Hz NTSC/PAL
- **Dynamic Range:** 14-bit
- **Humidity:** 5% to 95% non-condensing
- **Pixel Operability:** > 99%
- **Shock/Vibration:** 30 G/4.3 G
- **Dimensions:**
119 mm x 55 mm x 55 mm (L x W x H +/- 0.5 mm)
(4.69" x 2.17" x 2.17" (L x W x H \pm 0.02"))
- **Power:** 10V - 36V DC, < 3.3 W
- **Weight (without lens):** < 370 g (13.05 oz)
- **Interface:** RJ-45 Ethernet
- **Protocols:** TCP, UDP, ICMP, DHCP, RTSP
- **Video:** raw data
- **Polarity:** 10 options
- **Emissivity Correction:** 0.01 to 1.0
- **Protection:** IP54
- Internal non-uniformity correction (NUC)
- 1/4"-20 tripod support



FMX 700 P-Series